
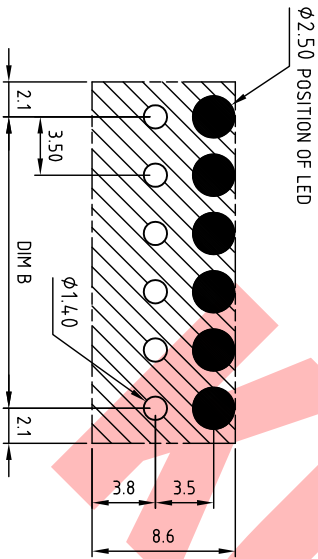
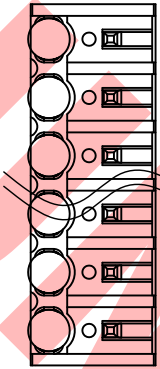
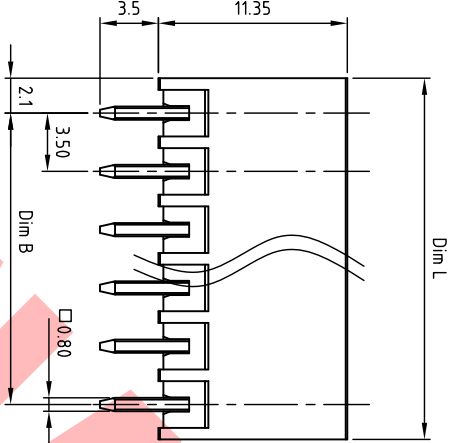


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

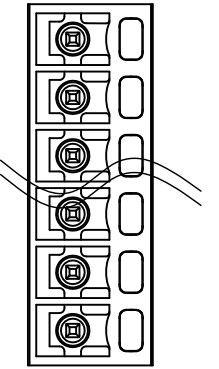

RECOMMENDED PCB LAYOUT

Technical data

- 1.Nominal voltage: 300V/8A
PITCH:3.5mm
- 2.Insulation Withstands Voltage:
AC1600V/MIN
- 3.Insulation Resistance:
1000MΩ or more at DC500V
- 4.Using temperature range:-40°C ~115°C
- 5.Soldering temperature range:260°C±5°C/10sec
- 6.Safety approval:
- 7.RoHS Compliance
- 8.Critical dimension:
- 9.Undimensioned Tolerances:

	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

HABV350 xx X LXX
 ① Poles 02-24
 ② Color
 0 Black
 ③ Custom
 L00 K-MARK L0K KUNALCON MARK.....

ITEM	NAME OF PART	DATE	UNITS	MATERIAL	NOTES	Q'TY
3	PIN			COPER	TIN PLATED	P
2	Light guide			PC UL94V-0		P
1	BODY			PA6T UL94V-0	BLACK	1

DWG	WF. Zhang	DATE	2018.03.31	SCALE	NONE 3:1 (.)	REV.	A	Tolerance
CHK.	WF. Zhang	DATE	2018.03.31					±0.50 ±0.30 ±0.10

APP.	DATE	TITLE	PART NO.	DWG NO.
		HA-BV350 Series Close type Vertical(180D) Light guide	HABV350xxxLxx	HA-B350-B201

△ SIGN DESCRIPTION CHK. DATE



KUNA Contact Technology Co., Ltd
 http://www.kunacon.com



RoHS symbol and other regulatory marks.